




TH 系列 (TH SERIES)



THERMAL CUTOFF 温度保险丝

Dimensions/ 尺寸 :

Unit 单位: mm

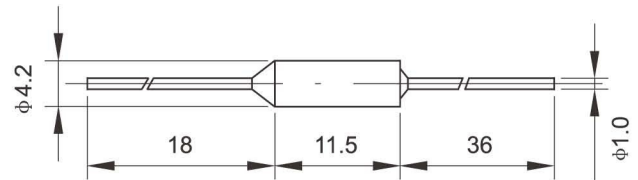

APPLICATION FOR:

Refrigerator, Air-conditioner, Washing Machine, Cleaner, Electric Tool, Hair Drier, Iron, Mangle, Electric Radiator, Electric Rice Cooker, Electric wok, Electric Fry Pan, Induction Cooker, Sandwich Maker, Coffee Maker, Electric Kettle, Electric Mug, Water Heater, Cold & Hot Water Dispenser, TV Set, Music Center, Computer, Aviation Instrument, Copier, Transformer, Capacitor, etc.

TECHNICAL PARAMETERS/ 技术参数 :

CATALOG NO. 目录编号	Rated Functioning Temp. Tf (°C) 额定动作温度	Fusing-off Temp. (°C) 实际动作温度	Holding Temp. Th(°C) 保持温度	Max. Temp. Tm(°C) 极限温度	Rated current Ir(A) 额定电流	Rated Voltage Ur(V) 额定电压	SAFETY APPROVALS 安全认证		
							CCC	VDE	cURus
TH66	66	64±2	42	130	10	250AC	●		
TH72	72	70±2	45	150	10	250AC		●	●
TH77	77	75±2	55	120	10	250AC	●	●	●
TH84	84	80±2	60	125	10	250AC	●		
TH93	93	90±2	66	150	10	250AC			●
TH94	94	92±2	66	150	10	250AC		●	●
TH99	99	97±2	71	150	10	250AC	●	●	●
TH105	105	103±2	80	150	10	250AC	●		
TH110	110	108±2	84	140	10	250AC	●	●	●
TH113	113	108±2	88	150	10	250AC	●		
TH121	121	119±2	94	150	10	250AC	●		
TH128	128	126±2	106	155	10	250AC	●	●	●
TH133	133	131±2	104	159	10	250AC	●	●	●
TH139	139	137±2	117	170	10	250AC	●		
TH142	142	140±2	114	159	10	250AC	●	●	●
TH152	152	149±3	128	176	10	250AC	●	●	●
TH157	157	154±2	127	172	10	250AC	●	●	●
TH167	167	165±2	146	190	10	250AC	●	●	●
TH172	172	170±2	144	189	10	250AC	●		
TH184	184	182±2	160	214	10	250AC	●	●	
TH192	192	189±3	164	300	10	250AC	●	●	●
TH198	198	196±2	170	250	10	250AC	●		
TH216	216	213±3	189	350	10	250AC	●	●	
TH228	228	225±3	190	300	10	250AC	●	●	●
TH240	240	234±3	190	350	10	250AC	●		●

● DENOTES FOR APPROVED

●表示已取得安全认证